




DETAIL A

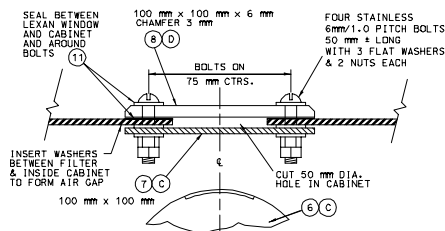


PHOTOELECTRIC SWITCH  
SECTION A-A  
WINDOW DETAIL

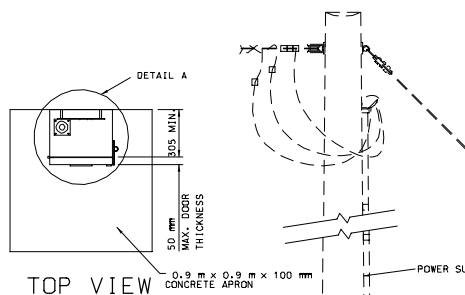

TOP VIEW



LABEL DETAIL  
(240 VOLT) (13)B

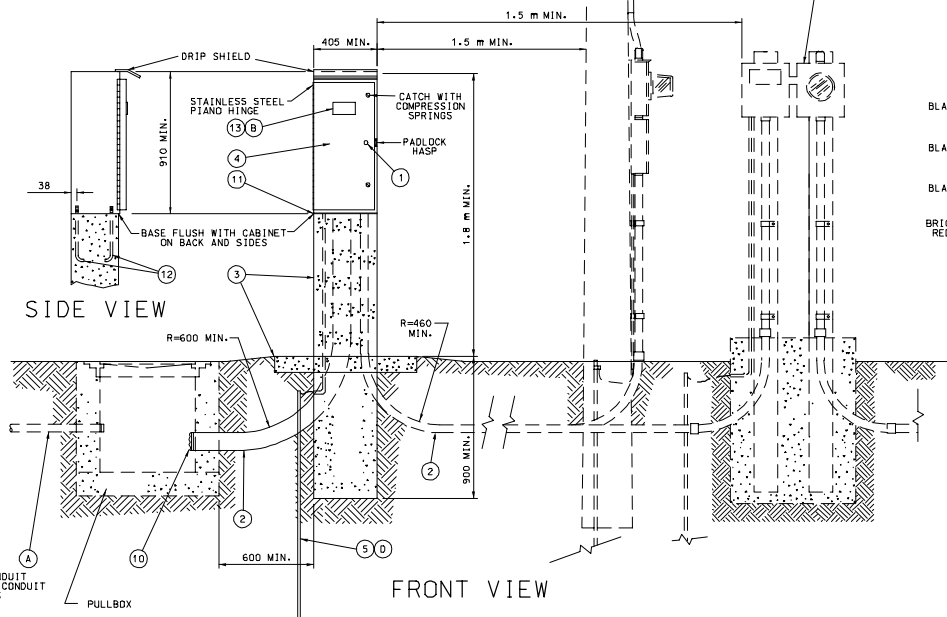

FRONT VIEW



LABEL DETAIL  
(480 VOLT) (13)B

LIST OF MATERIALS	
ITEM	DESCRIPTION
1	#2 CORBIN LOCK
2	RIGID CONDUIT *
3	CLASS B CONCRETE, 0.3 m <sup>2</sup> ±
4	NEMA 4, DUST-TIGHT, WATERTIGHT, CABINET
5	GROUND ROD, 19 mm DIA. x 2.4 m MIN.
6	PHOTOELECTRIC SWITCH AND SOCKET, 105/285 V., 1000-WATT
7	TRANSLUCENT, PLEXIGLASS FILTER #W2067, 3 mm THICK
8	CLEAR, LEXAN #9034 WINDOW, 6 mm THICK MIN.
9	MOUNTING PAN, 800 mm x 305 mm x 6 mm ALUMINUM OR STAINLESS STEEL
10	PLIABLE DUCT SEALANT
11	LIFETIME SILICONE CAULK
12	ANCHOR BOLTS, 16 mm/2.0 PITCH x 355 mm LONG BOLTS, HOT DIP GALVANIZED, 4 REQUIRED
13	WEATHERPROOF ADHESIVE LABEL, VINYL RAISED LETTERING (OR EQUIVALENT, SEE DETAIL)
*	SEE PLANS

#### NOTES

- IF CABLE-CONDUIT IS SPECIFIED, THE CONDUIT SHALL BE CUT AWAY FROM CABLES BETWEEN PULL BOX AND CONTROL STATION.
- LIGHTING SYSTEM VOLTAGE AS SPECIFIED ON PLANS.
- PHOTOELECTRIC SWITCH BRACKETS MAY VARY. LOCATE CENTER OF WINDOW OVER CENTER OF PHOTOELECTRIC SWITCH.
- IF SUBSURFACE CONDITIONS EXIST WHICH PROHIBIT THE PLACEMENT OF THE GROUND ROD IN A VERTICAL POSITION, THE ROD MAY BE DRIVEN AT AN OBlique ANGLE NOT TO EXCEED 45 DEGREES FROM VERTICAL OR BURIED IN A TRENCH AT LEAST 750 mm DEEP. CONNECTION TO GROUND ROD SHALL BE CAWELDED.

#### GENERAL NOTES:

ALL DIMENSIONS SHOWN ARE IN mm UNLESS OTHERWISE NOTED.

ALTERNATE CABINET DIMENSIONS WILL BE ALLOWED AS APPROVED BY THE ENGINEER. INTERIOR CABINET VOLUME SHALL BE EQUAL TO OR GREATER THAN THAT SHOWN ON PLANS AND PROPER CLEARANCES SHALL BE PROVIDED FOR ALL EQUIPMENT. CONCRETE BASE DIMENSIONS SHALL BE MODIFIED TO FIT THE CABINET SUPPLIER.

PLACEMENT OF ALL ITEMS SHALL BE APPROVED BY THE ENGINEER.

CABINET SHALL BE LOCATED AWAY FROM TRAFFIC. TOP MOUNT PHOTO CONTROL SHALL FACE AN OPEN SKY. SIDE MOUNT PHOTO CONTROL SHALL FACE NORTH.

SEE PLANS FOR CIRCUIT WIRING; MAXIMUM LOADING PER CIRCUIT IS 7,400 WATTS FOR 240 VOLT AND 11,000 WATTS FOR 480 VOLT.


SCHEMATIC DIAGRAM SHALL BE MOUNTED ON INSIDE OF CABINET DOOR.

THE UTILITY SHALL BE NOTIFIED IN WRITING 30 DAYS PRIOR TO DATE SERVICE WILL BE REQUIRED.


ALL OPENINGS IN CABINET SHALL BE COVERED AND SEALED WITH LIFETIME SILICONE CAULK.

ALL MATERIALS REQUIRED EXCLUDING REFERENCE ITEMS AS SHOWN ON DRAWING SHALL BE INCLUDED IN PRICE BID FOR CONTROL STATION.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
HIGHWAY LIGHTING			
BASE MOUNTED CONTROL STATION			
240V OR 480V - 4 CIRCUIT			
DATE: _____	EFFECTIVE: 04-01-2002	M901.30E	1/2

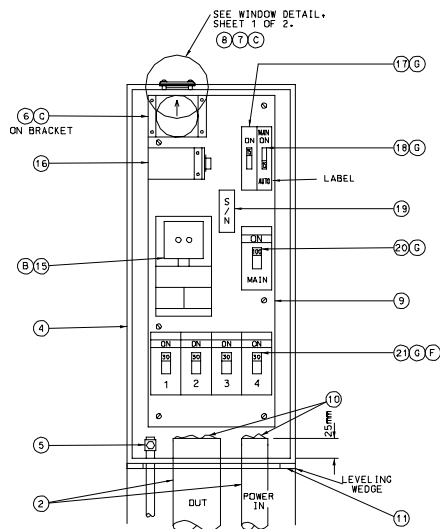

EQUIPMENT LAYOUT

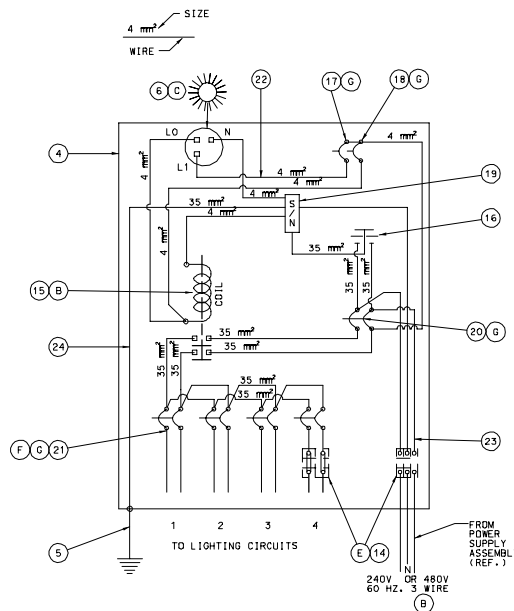

WIRING DIAGRAM

LIST OF MATERIALS	
ITEM	DESCRIPTION
2	RIGID CONDUIT *
4	NEMA 4, DUST-TIGHT, WATERTIGHT CABINET
5	GROUND ROD, 19 mm DIA. x 2.4 m MIN.
6	PHOTOELECTRIC SWITCH AND SOCKET, 105/285 V., 1000 WATT
7	TRANSLUCENT, PLEXIGLASS FILTER #2067, 3 mm THICK
8	CLEAR, LEXAN #9034 WINDOW, 6 mm THICK MIN.
9	MOUNTING PAN, 800 mm x 305 mm x 6 mm ALUMINUM OR STAINLESS STEEL
10	PLIABLE SEALANT
11	LIFETIME SILICONE CAULK
14	INSULATED TERMINAL BLOCK, FOR GREATER THAN 140 mm <sup>2</sup> CABLE
15(240V)	2-POLE, 100 AMP, 120V COIL LIGHTING CONTACTOR
15(480V)	2-POLE, 100 AMP, 240V COIL LIGHTING CONTACTOR
16	2-POLE, 650 VOLT LIGHTING ARRESTER
17	1-POLE, 15 AMP, TYPE B CONTROL BREAKER
18	1-POLE, 15 AMP, TYPE B MANUAL-AUTO SWITCH
19	INSULATED GROUNDABLE NEUTRAL, 100 AMP
20	2-POLE, 100 AMP, TYPE A MAIN BREAKER
21	2-POLE, 15 AMP (MIN.), TYPE A LIGHTING BREAKERS
22	#4 mm <sup>2</sup> MIN., 600 V. CONTROL CABLE
23	#35 mm <sup>2</sup> MIN., 600 V. * POWER CABLE
24	#35 mm <sup>2</sup> MIN., 600 V. * GROUND CABLE
*	SEE PLANS

# NOTES

- (B) LIGHTING SYSTEM VOLTAGE AS SPECIFIED ON PLANS.
- (C) PHOTOELECTRIC SWITCH BRACKETS MAY VARY. LOCATE CENTER OF WINDOW OVER CENTER OF PHOTOELECTRIC SWITCH.
- (E) IF FOR REASONS OF VOLTAGE DROP A WIRE SIZE IS SPECIFIED LARGER THAN THE BREAKER LOAD CAN ACCOMMODATE, AN INSULATED HEAVY DUTY TERMINAL BLOCK SHALL BE INSTALLED TO TERMINATE THE LARGER WIRES AND A SMALLER JUMPER CONNECTED TO THE BREAKER ITSELF.
- (F) LIGHTING BREAKER SIZING:
- | SIZE (AMPS) | 240V TOTAL CIRCUIT LOAD (WATTS) | 480V TOTAL CIRCUIT LOAD (WATTS) |
|-------------|---------------------------------|---------------------------------|
| 15          | 0-2800                          | 0 - 5500                        |
| 20          | 2850-3700                       | 5550 - 7400                     |
| 25          | 3750-4600                       | 7450 - 9200                     |
| 30          | 4650-5500                       | 9250 - 11,000                   |
| 35          | 5550-6500                       | ---                             |
| 40          | 6500-7400                       | ---                             |
- (G) ALL CIRCUIT BREAKERS SHALL CONFORM TO SECTION 901.4 OF THE STANDARD SPECIFICATIONS.

MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION			
HIGHWAY LIGHTING			
BASE MOUNTED CONTROL STATION			
240V OR 480V - 4 CIRCUIT			
DATE: _____	EFFECTIVE: 04-01-2002	M901.30E	2 2